


Other Lifting Anchors

All Purpose Anchor

Lifting Anchor for Recon retaining walls.

Can replace wire rope anchors in other retaining wall systems and in other miscellaneous products.

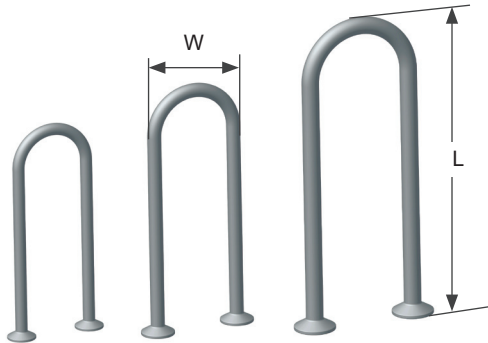


ITEM #	WIRE DIAMETER	WIDTH (W)	LENGTH (L)	WEIGHT (LBS)	SWL (LBS)
AP-1/4x6	1/4"	2-3/4"	6"	0.17	1600
AP-5/16x6-1/2	5/16"	2-5/8"	6-1/2"	0.33	3200
RECON-2	3/8"	2-3/4"	7"	0.51	4200
AP-7/16x9	7/16"	3-1/2"	9"	1.07	7500

Safe working loads based on approximate 4:1 Safety Factor in 2,500 psi normal weight concrete.

Recon-2 Recess Formers


Designed to work with Recon-2 lifting anchor, available in reusable rubber and reusable magnetic.



ITEM CODE	D	L	TW	BW	TYPE
RECON-RRF	3-1/8"	6"	2-3/4"	4-1/8"	Standard
RECON-MRF	3-1/8"	6"	2-3/4"	4-1/8"	Magnetic

A-W Anchor

For face lifting flat slabs in tension.

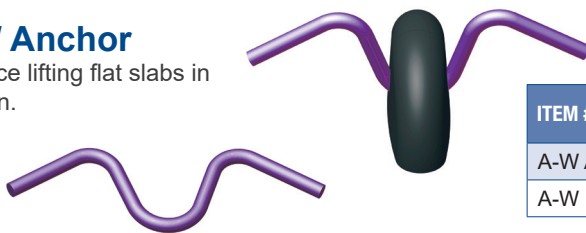


ITEM #	WIRE DIAMETER	WIDTH	HEIGHT	LENGTH	WEIGHT	SWL (LBS)
A-W Anchor	1/2"		3-1/2"	11-3/4"	0.83 LB	4500
A-W RRF		2"	3"	6-1/2"		

Safe working loads based on approximate 4:1 Safety Factor in 4,000 psi normal weight concrete.

Heba-T

Economical lifting for thin slab products. Available with either a steel setting plate or reusable rubber recess former for clean storage. Reusable rubber recess void former allows for standard hook lifting. Designed for 3" thick concrete.

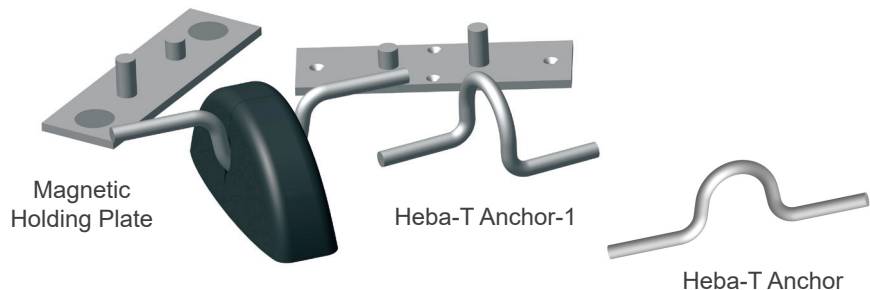

ITEM CODE	DESCRIPTION	TENSION CAPACITY 4:1 SAFETY FACTOR	MIN. CONCRETE THICKNESS	MIN. EDGE DISTANCE
HEBA-T ANCHOR	8MM anchor lifting hook	1,500 lbs	3"	6"
HEBA-T ANCHOR-1	8MM anchor lifting hook, parallel to void	1,500 lbs	3"	6"
HEBA-T MAG	Heba-T magnetic plate			
HEBA-T PLATE	Heba-T steel setting plate			
HEBA-T RRF	Heba-T reusable rubber recess former			

Safe working loads based on approximate 4:1 Safety Factor in 5000 psi normal weight concrete.